


PAC-42GF

4-slot Full-size Compact Chassis

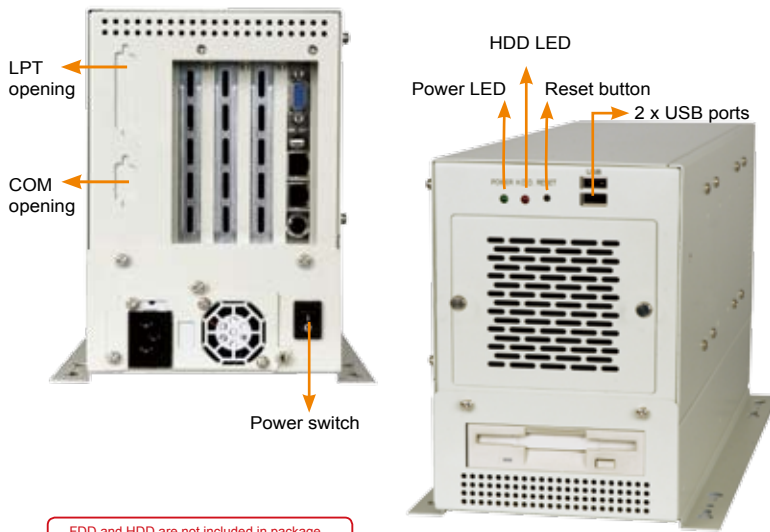

FDD and HDD are not included in package.

Features


- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ One 3.5" drive bay
- ◆ Two 3.5" or 2.5" internal HDD bays
- ◆ Hot swappable 8 cm cooling fan

Specifications


◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU cards
◆ Drive Bays	1 x front-accessible 3.5" with 2 x 3.5" HDD or 1 x front-accessible 3.5" with 2 x 2.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O ports	2 x USB
◆ I/O openings	1 x LPT, 1 x COM
◆ Expansion Slots	4 slots
◆ Indicators	Power, HDD
◆ Button	Power switch, reset
◆ Operating Temperature	0°C~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	4.6 kg / 6.8 kg
◆ Dimensions (DxWxH)	405 mm x 140 mm x 200 mm

Ordering Information

Part No.	Description
PAC-42GFW/ACE-4518AP/PCI-4S	4-slot full-size chassis, white, with ACE-4518AP-RS and PCI-4S-RS-R40, RoHS

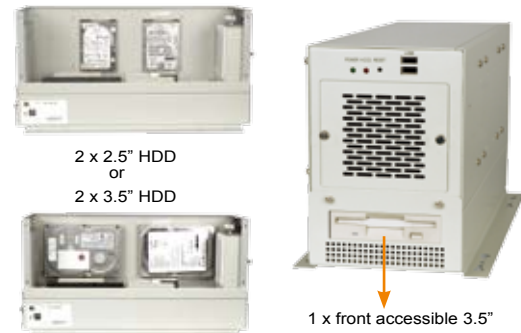

Dimensions

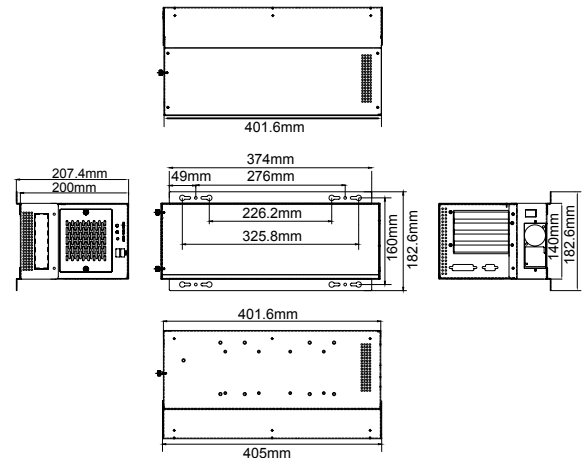

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
PCI-4S-RS-R40	PICMG 1.0	3	1	0	0	0	AT/ATX
¹ PE-4S-R40	PCIMG 1.3	1	0	0	1	1	ATX
¹ PE-4S2-R40	PCIMG 1.3	2	0	0	0	1	ATX
¹ PE-4S3-R40	PCIMG 1.3	0	0	2	0	1	ATX

¹ Only R20 or later version can support PICMG 1.3 backplane

Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-4518AP-RS	180W

PAC-42GF can support single 1U height PSU. For more models of IEI PSU, please visit www.ieiworld.com.

1
Application
Server
Platform

2
Single
Board
Computer

3
IBX Series
POS PC

4
AFOLUX
POS
Panel PC

5
Video
Capture
Card

6
KAMIO
RISC

7
IOVU
Open HMI

8
VITO
Universal
Controller

9
DINO
BLADE

10
LCD
Product
Series

11
Embedded
System

12
Industrial
Computer
Chassis

13
Power
Supply

14
Peripherals